



Network Resource Management Architecture with Unified Information Models


Shingo Horiuchi, Kazuaki Akashi, Masataka Sato, and Tadashi Kotani
NTT Access Network Service Systems Laboratories

E-mail: {horiuchi.shingo, akashi.kazuaki, sato.masataka,
kotani.tadashi} @lab.ntt.co.jp

情報管理区分: B(関係者限り)
Copyright © 2017 NTT corp. All Rights Reserved.

Abstract

With a view to the coming era of network virtualization, NTT is working on network operations that can flexibly manage diverse types of networks including those currently in operation. This article introduces network resource management technology for comprehensively operating a wide range of networks by expressing management specifications based on a uniform information model.

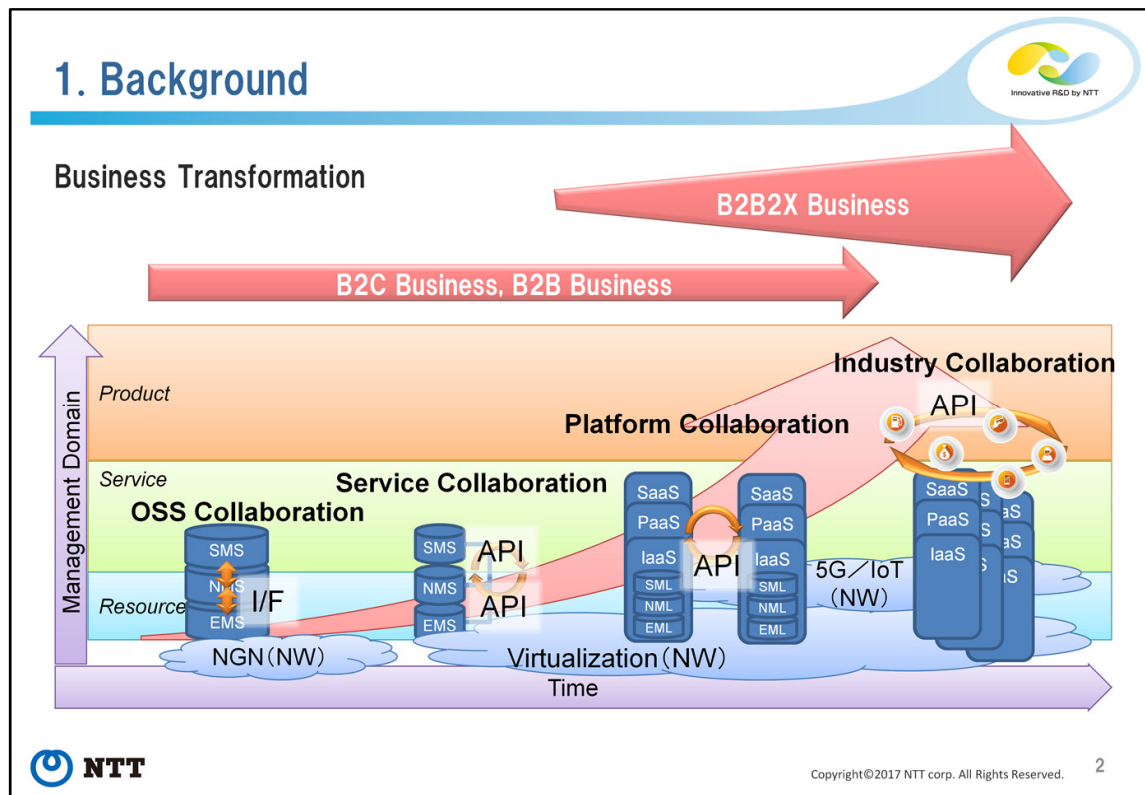

1. Background

The environment surrounding telecom carriers has changed dramatically in recent years. This change has been most remarkable in two key domains: the network domain, which comprises the access and core network, and the business domain.


In the network domain, much progress has been made in virtualization technology, which enables network functions to be implemented by software and network construction to be achieved using low-cost, general-purpose servers and switches. In contrast to conventional networks that make use of dedicated communications equipment, There has been concern that the separation of hardware and software by virtualization technology will drive up the cost of operations.

Meanwhile, in the business domain, telecom carriers are looking to transform themselves from simple circuit service providers to business co-operators based on the "B2B2X model" which provide customers with services via other service providers.

The goal here is a service-creating collaboration with all kinds of service providers spanning diverse business fields.

This means that telecom carriers themselves must be flexible for various types of businesses, which, in turn, means that telecom operations must be able to provide services that can combine a variety of networks and other services in a flexible manner.

2. Telecom Operation and Requirement for OSS

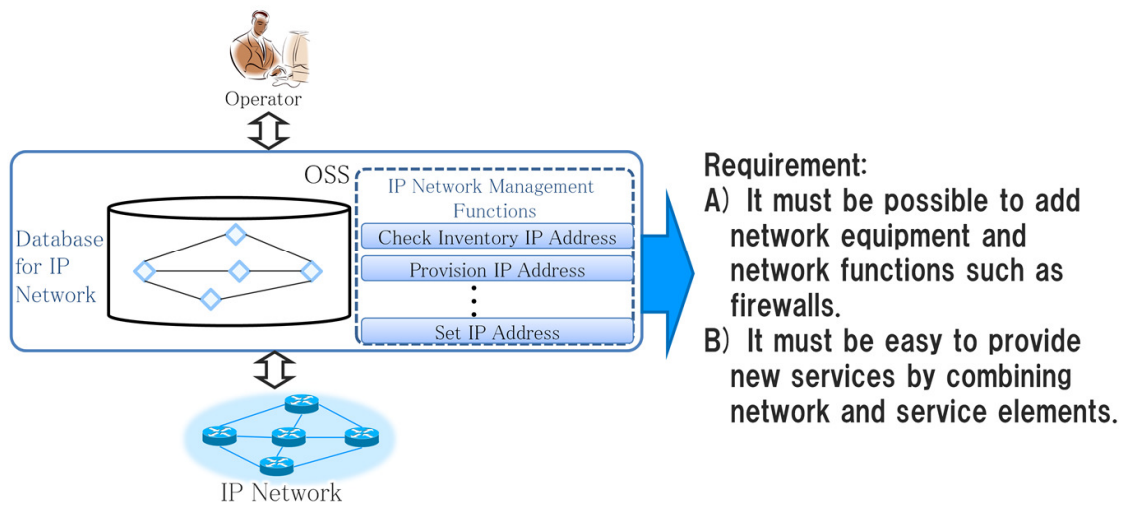

Copyright©2017 NTT corp. All Rights Reserved.


3

2. Telecom Operation and Requirement for OSS

Telecom operations include the work of accepting a service order from a customer, configuring network equipment based on service requirements, and providing that communications service to the customer. Such work can be made more efficient through the use of an operations support system (OSS). An OSS is equipped with a database for storing the management information needed for each type of network communications method and functions for managing that information.

When constructing an OSS, the following requirements must be met to prevent operations from becoming overcomplicated through virtualization and to provide support for diverse types of businesses.

- A) It must be possible to add network equipment and network functions such as firewalls.
- B) It must be easy to provide new services by combining network and service elements.

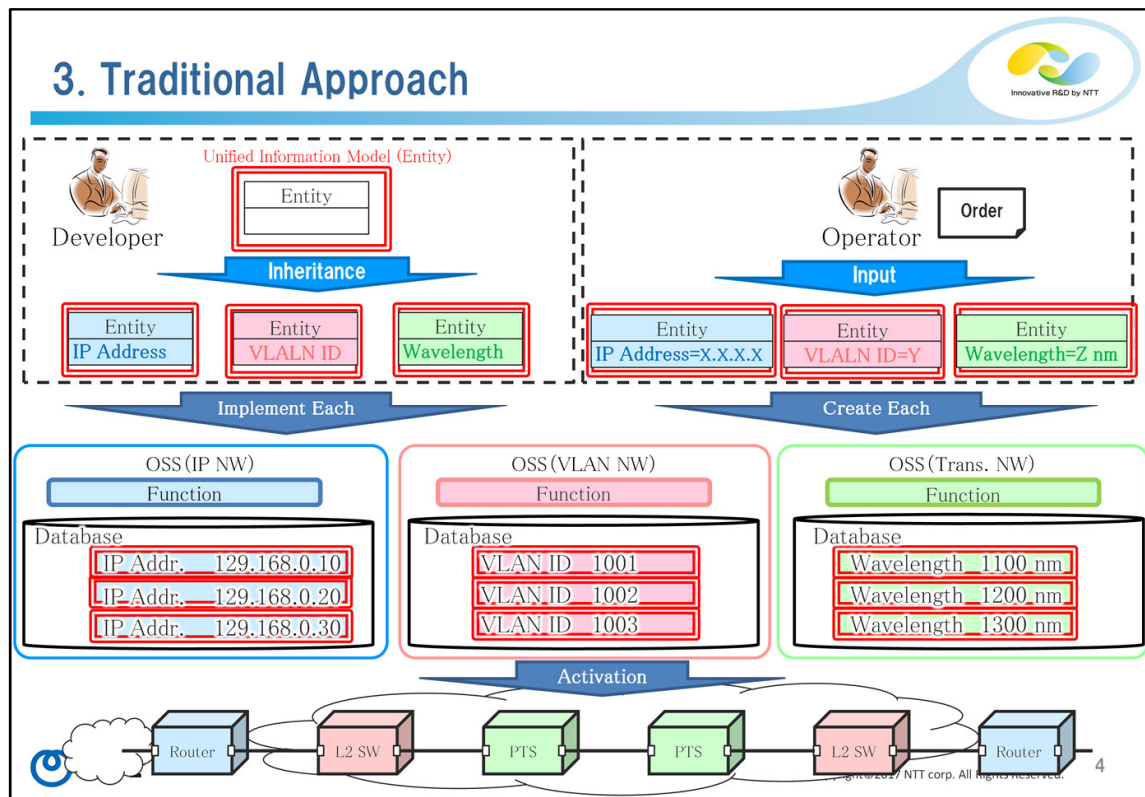


3. Traditional Approach

The approach up to now has been to develop and construct an OSS specifically for each communications service and its network provided by the telecom carrier. This development and construction format, called a “silo” approach, can incur considerable development costs with regard to requirement A) above[1].

To satisfy requirement A), efforts have been made to unify the information model managed by the OSS. In particular, an information framework called the Shared Information/Data Model (SID) has been discussed at TM Forum[2].

However, simply adopting a uniform information model will not completely eliminate the effects of adding new network equipment and changing management attributes on the OSS database and management functions. There is a need for a mechanism that can flexibly add equipment- and network-specific attributes to the OSS.

Next, with regard to requirement B), it has been difficult with the conventional silo-type OSS to provide users with communications services in a highly convenient format that combines different services as needed. Consequently, to satisfy this requirement, it must be possible to uniformly manage information in the vertical direction from the physical equipment making up the network to the layers of communications protocols used on that equipment, and simultaneously, to manage information in the horizontal direction from the access network to the core network in an end-to-end manner.

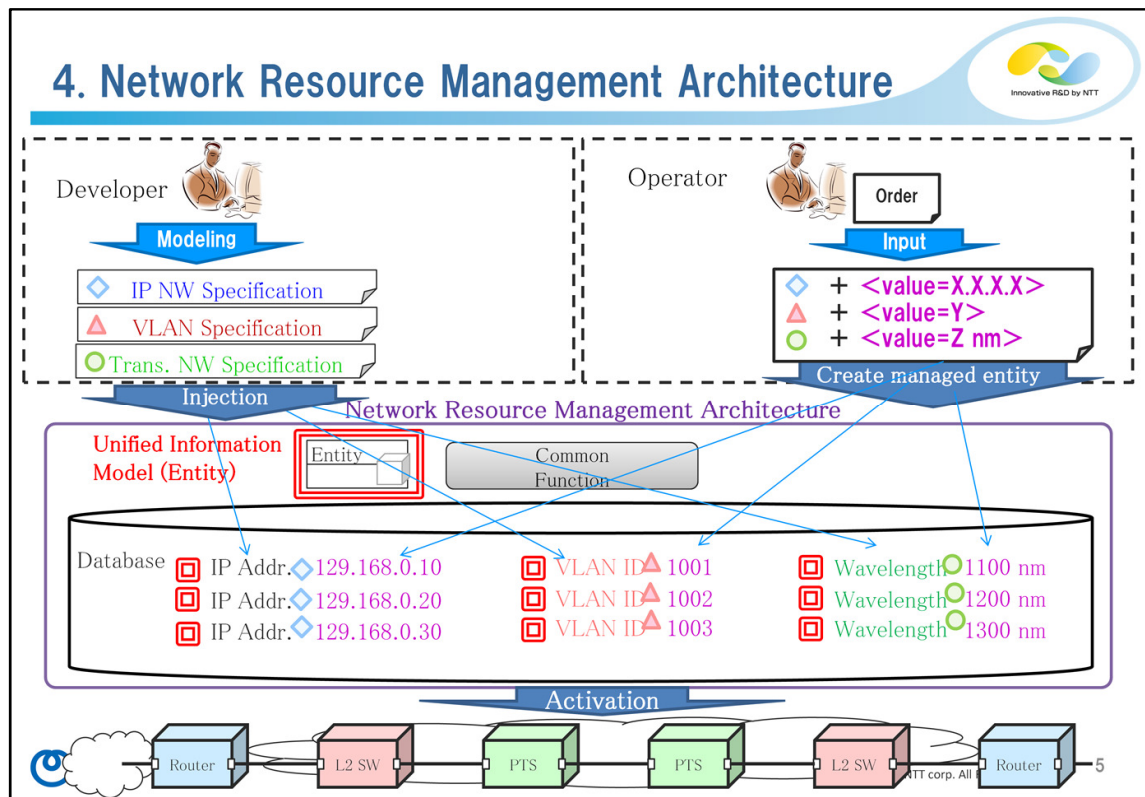


4. Network Resource Management Architecture

In response to the issues described above, we have been researching network resource management architecture that can provide flexible support for diverse types of networks[3].

This architecture is outlined in the figure. It incorporates configuration-management functions based on generic management targets (entities) as a mechanism for constructing the database necessary for network management. It also features an external mechanism for prescribing individual equipment and communications-protocol characteristics as a “specification” separate from the OSS program. This information can be prescribed together with inter-layer relationships in the vertical direction to enabled integrated management in both the vertical and horizontal directions. In this way, a mechanism is achieved for changing the operation of the OSS program based on injected specifications and the relationships between those specifications.

This architecture makes it possible to build a network management database independent of any particular network. It also possesses extensibility enabling individual network characteristics to be appropriately expressed.

5. Entity and Specification

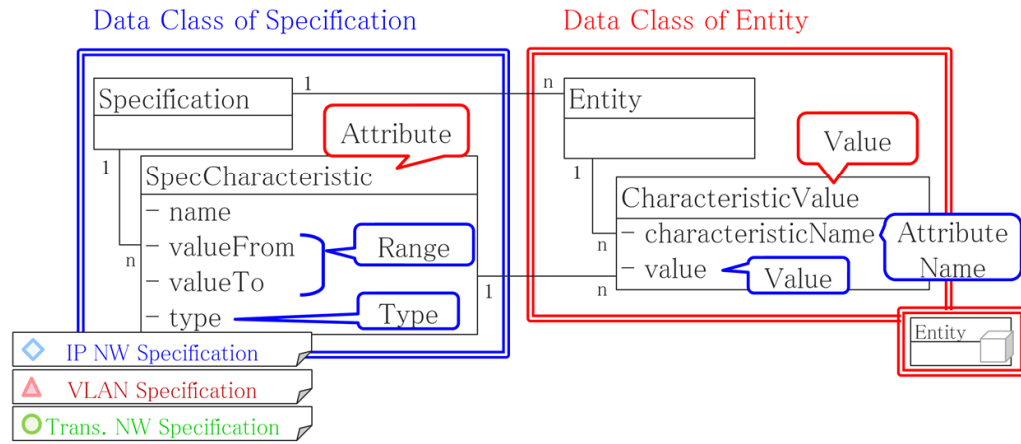

Copyright©2017 NTT corp. All Rights Reserved.

6


5. Entity and Specification

This architecture includes a mechanism for adding characteristics of each communications protocol to the above generic entities and for storing protocol-specific information. The SID defines a Specification class that prescribes an entity specification and a SpecCharacteristic class that prescribes the attributes of that specification. It also defines a CharacteristicValue class with respect to an SID entity that prescribes attribute values expressing characteristics related to each protocol. In this architecture, using these Specification, SpecCharacteristic, and CharacteristicValue classes makes it possible to give common, generic entities characteristics that differ for each protocol.


6. Common Function



1. Data Creation

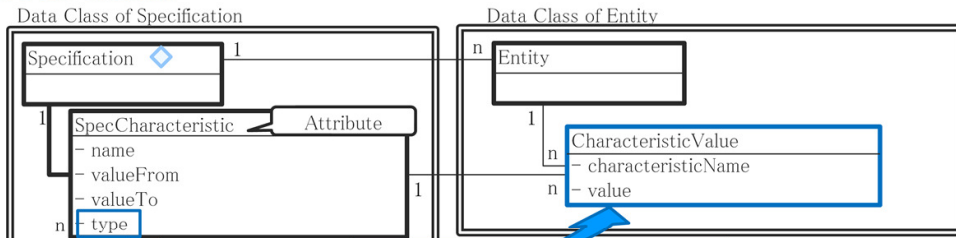

2. Validation Check

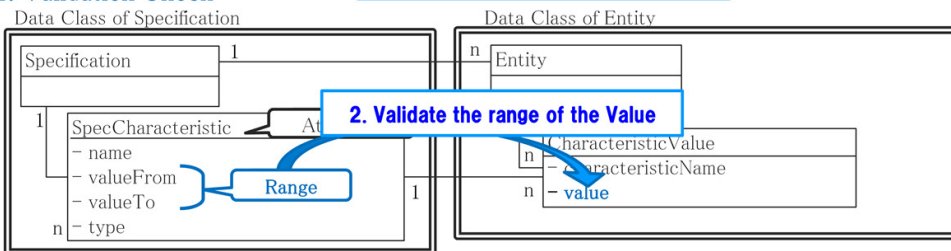

Copyright©2017 NTT corp. All Rights Reserved.


7

6. Common Function

In this architecture, to realize the OSS for the diverse networks with the database in which the entities is separated from the specifications describing the management attributes of network architecture, we propose the essential entities for the network topology and the specifications of other information that we can inject into the entities.

Specification is defined by the attribute adding into the Entity to manage the specific network, the value and the range. This Specification realize the common functions, for example, to create the data and to validate the range of the value.

7. Logical Resource Entity

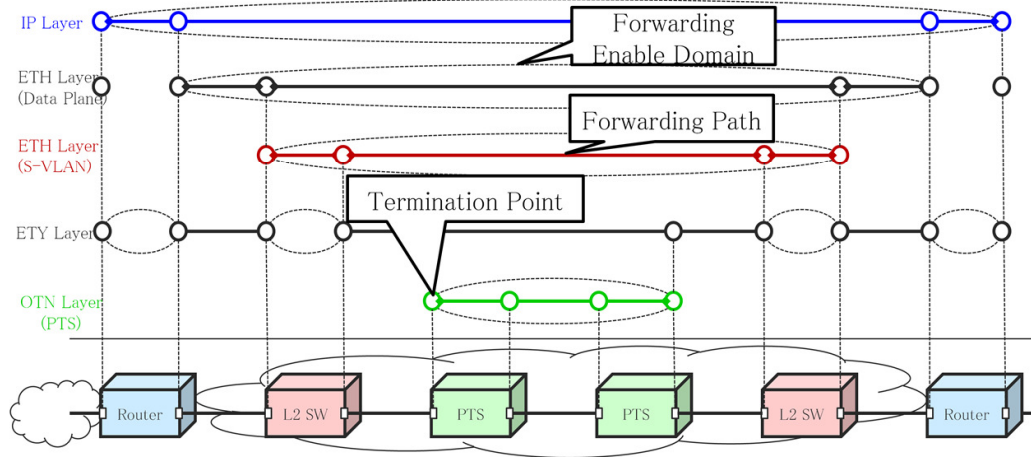

Copyright©2017 NTT corp. All Rights Reserved.


8

7. Logical Resource Entity

This technology enables a correspondence to be defined between SID logical resources used in this architecture as entities and individual pieces of network equipment used as network elements. The information expressed here as SID-logical-resource entities complies with Recommendation ITU-T G.800 (a compilation of uniform constructs (such as definitions and signals) for expressing the information transfer capability of a communications network), which means that transfer and coding functions for frame and packets in equipment for each type of communications protocol are treated as concepts that can be converted into data. Furthermore, to achieve a protocol stack based on the OSI Reference Model, SID logical resources are prescribed in such a way that the concept of information transfer capability can be defined in a recursive manner. This makes it possible to express inter-layer relationships in the vertical direction.

Among SID logical resources, the following three entities are typical of those adopted by this architecture: Termination Point Encapsulation (TPE: a termination point on a communications protocol layer), Network Forwarding Domain (NFD: the domain expressing the connection relationship between TPEs and enabling information transfer on each layer), and Forwarding Relationship Encapsulation (FRE: information-transfer path generated on NFD).

The management information necessary for managing multilayer communications protocols can be expressed by combining these generic entities.

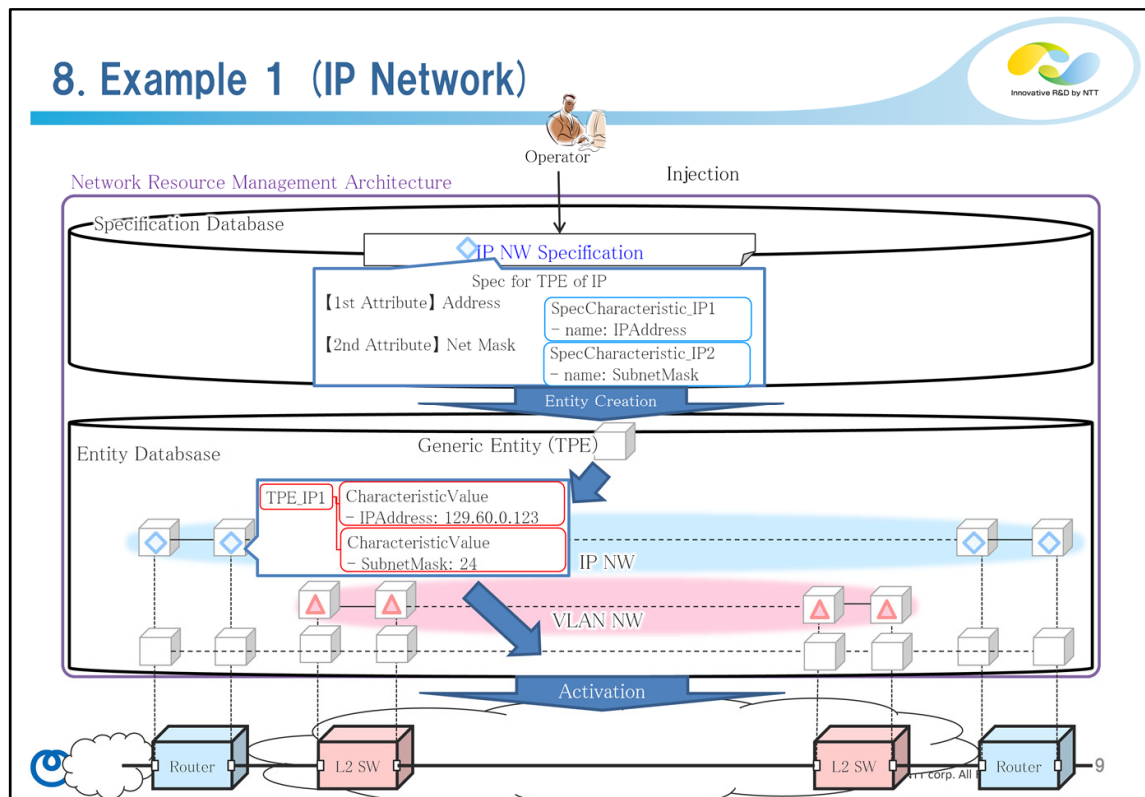


8. Example 1 (IP Network)

This figure shows an example of implementing the architecture described above and generating the entities to manage an IP network.

The process of developing an OSS service/network consists of defining the IP-network information of an entity as a Spec for managing an IP network and registering that Spec in the proposed architecture. For example, to manage the IP address and subnet mask of a point (TPE) in an IP network, it would be necessary to define a Spec that adds the IP address (name) as the first attribute (SpecCharacteristic) and the subnet mask (name) as the second attribute (SpecCharacteristic). In addition, the range taken by the IP address or subnet mask is defined beforehand by the SpecCharacteristic valueFrom and valueTo while the format of the IP address or subnet mask value is likewise defined beforehand by type. In the above way, SpecCharacteristic enables extensibility without having to directly give attribute information to a “point (TPE) entity.” This is a key feature of the proposed architecture.

To manage an IP network when providing a service using OSS, the service-provisioning operator instructs that a TPE entity be generated in the network, applies a Spec to the TPE entity for use by the IP network, and generates data that associates an IP address(129.60.0.123) and subnet mask(24) with the entity as attributes.

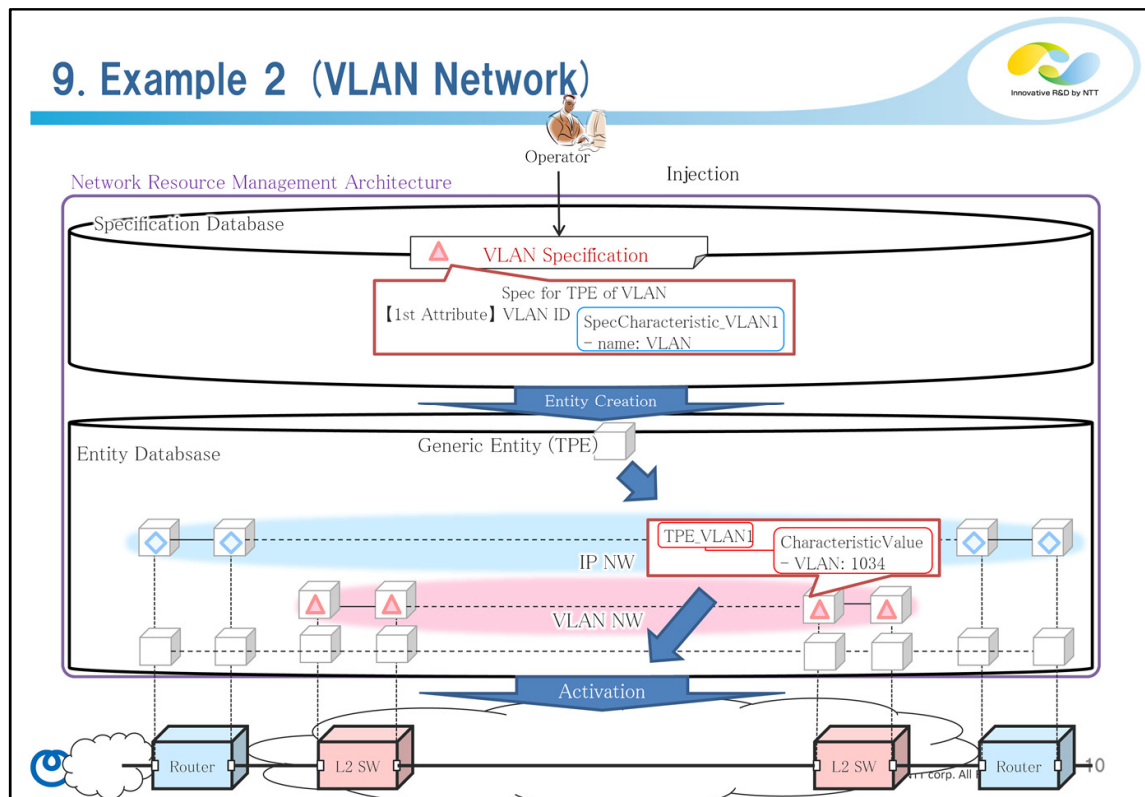


9. Example 2 (VLAN Network)

This is another example which shows the flow of generating a entity of Ethernet VLAN network in this architecture.

To manage a VLAN network in the process of developing a service/network, the service developer defines and registers a Spec for the entity configuring the VLAN network, similar to the flow in the IP network example given above. The Spec defines VLAN (name) as the first attribute (SpecCharacteristic) and the range allowed by VLAN ID as the SpecCharacteristic valueFrom and valueTo. Defining Spec in this way enables a service-provision operator to generate TPE(TPE_VLAN1) for storing VLAN management information (VLAN: 1234) and associating a CharacteristicValue used by the VLAN network with “point (TPE) entity” used in common by the IP network.

As shown by the above example, this architecture enables the development of an OSS capable of integrated management of multiple layers by preparing a Spec for each type of communications protocol and combining those Specs as needed.

10. Conclusion

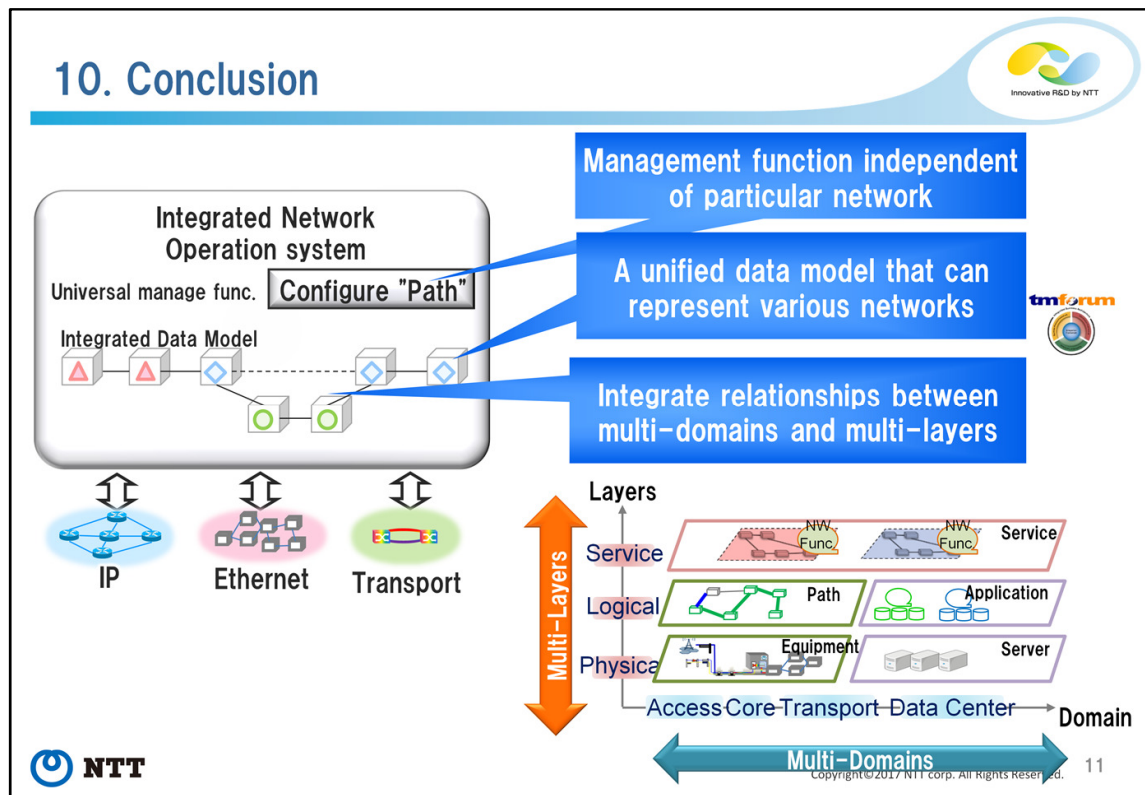

10. Conclusion

This article introduced the network resource management technology under development at NTT Access Network Service Systems Laboratories for comprehensively managing diverse types of networks like this.

Going forward, our plan is to conduct trials operations in a small-scale, commercial network to test the effectiveness and the merits of this technology.

Reference:

- [1] Kazuaki AKASHI, Masataka SATO and Shingo HORIUCHI, "A Study on Operation Support System's Requirements and Data Models for Service Collaboration," IEICE Technical Report, vol. 115, no. 507, ICM2015-59, pp. 87-92, March 2016.
- [2] TM Forum, <http://www.tmforum.org>
- [3] Masataka SATO, Kazuaki AKASHI, Shingo HORIUCHI and Tadashi KOTANI, "Study of Variable Management Architecture for Diverse Networks," IEICE Technical Report, vol. 116, no. 324, ICM2016-31, pp. 37-42, November 2016.